
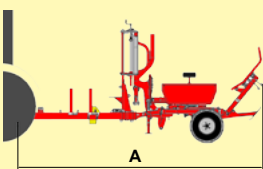




# Mechanically-controlled, self-loading Z593 bale wrapper with front loading

| TYPE | WEIGHT [kg] | POWER REQUIREMENT [kW] | WRAPPED BALE DIAMETER [mm] | WRAPPED BALE LENGTH [mm] |  |  |
|------|-------------|------------------------|----------------------------|--------------------------|--|---|
| Z593 | 1250        | min. 30                | 1000-1200                  | 1200                     |  |  |

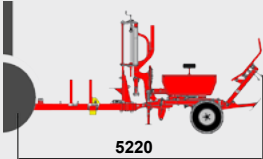

The L-02 wrap counter is an electronic device used for counting wraps on a bale.

A hydraulic bale positioning device gently unloads the wrapped bale and positions it upright.



Four rotary shafts. The ribs on the bale wrapper drums improve their durability and prevent sliding of the bale.



The bale wrapper is equipped with hydraulic control (with distributor with levers located in the tractor cabin).




Universal 500 mm and 750 mm film feeder.

Adjustable, articulated parking jack of bale positioning device allows adjustment of the height from which to drop the bale.

Film cutting mechanism.

Containers for two additional rolls of film.

The KRUS logo confirms the high quality of the machine which ensures increased operating safety.

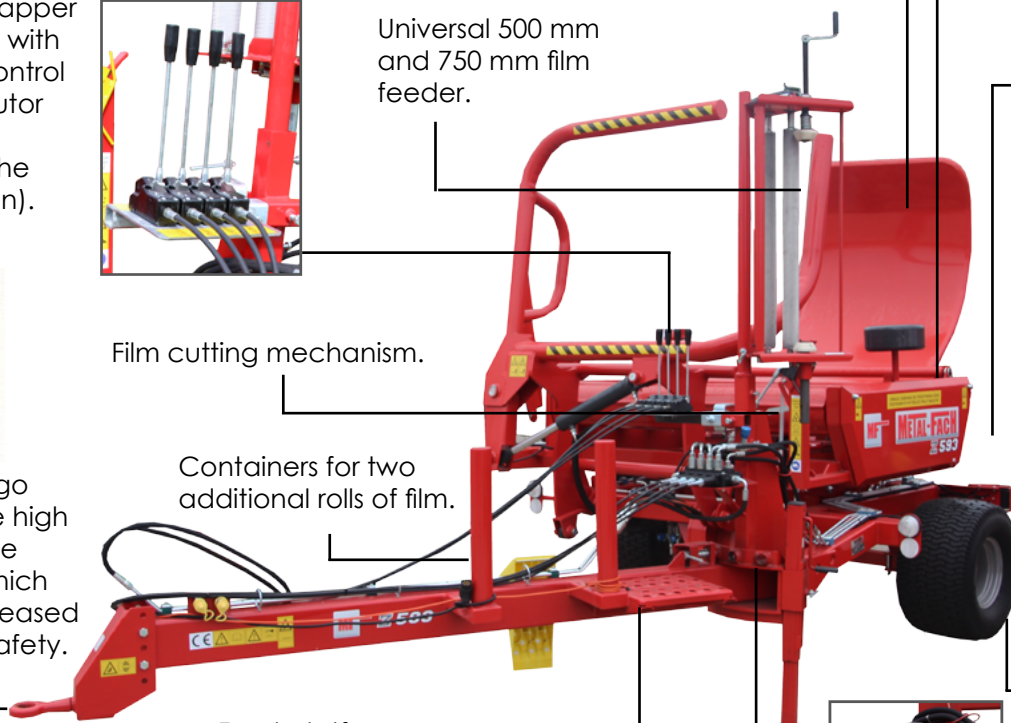

Lighting system.



Connection to the tractor using a drawbar with agricultural hitch. Adjustable drawbar height.

Front platform facilitates safe servicing.



Working and transport positions of the machine.



Easy to use mechanical parking jack



Wide 26.5-14.00-12 wheels decrease the pressure exerted by the machine on soil during operation.



| Item                           | Type   | Z593-00   |
|--------------------------------|--|---|
| <b>Bale characteristics</b>    |  |   |
| 1                              | Wrapped bale diameter [mm]   | 1000-1200   |
| 2                              | Wrapped bale length  | 1200  |
| 3                              | Maximum bale weight [kg]   | 800   |
| 4                              | Bale wrapping time [min]   | approx. 1.3/2   |
| 5                              | Film width [mm]  | 500/750   |
| <b>Machine characteristics</b> |  |   |
| 6                              | Number of table revolutions while using 500 mm / 750 mm film [revolutions] | 24/16   |
| 7                              | Bale loading method  | automatic, with loading arm                           |
| 8                              | Bale unloading method  | automatic with an unloading unit                      |
| 9                              | Machine drive  | hydraulic   |
| 10                             | Wheel track [mm]   | 2000  |
| 11                             | Wheel size   | 26.5x14.00-12   |
| 12                             | Tyre pressure [bar]  | 1.7   |
| <b>Overall dimensions</b>      |  |   |
| 13                             | Weight [kg]  | 1250  |
| 14                             | Length [mm]  | 5220  |
| 15                             | Width [mm]   | 2200  |
| 16                             | Height [mm]  | 2500  |
| <b>Tractor requirements</b>    |  |   |
| 17                             | Method of coupling to the tractor  | mounted   |
| 18                             | Coupling to a tractor by   | agricultural hitch                                    |
| 19                             | Tractor power output [kW]  | min. 30   |
| 20                             | Recommended tractor pump output [l/min]                                    | 22  |
| 21                             | Required pressure in the tractor power hydraulic system [MPa]              | 14  |
| 22                             | Maximum transport speed [km/h]   | 15  |
| <b>Electrical System</b>       |  |   |
| 23                             | Machine lighting   | in accordance to the requirements of the traffic code |
| 24                             | Electrical system voltage [V]  | 12  |
| <b>Optional equipment</b>      |  |   |
| 25                             | Automatic film cutter  | V   |
| 26                             | Wrapping film feeder   | V   |
| 27                             | Wrap counter   | V   |
| 28                             | Support foot   | V   |
| 29                             | Transport wheel position   | V   |
| 30                             | Hydraulic bale positioning device  | V   |

Key:

V standard

• optional