
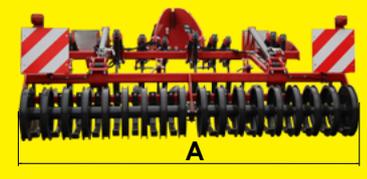


U490, U487 Stubble cultivator – 3 m, 3.5 m, 4.2 m

TYPE	WEIGHT [kg]	POWER REQUIREMENT [kg]	NO. OF DISCS	DISC SIZE	NO. OF TINES	
U490	2120 kg	120-190 HP	7 pcs	460x4 mm	10 pcs	3 m / 3 m
U490/1	2340 kg	130-210 HP	8 pcs	460x4 mm	12 pcs	3.5 m / 3.5 m
U487	3400 kg	150-240 HP	10 pcs	460x4 mm	14 pcs	4.2 m / 3 m

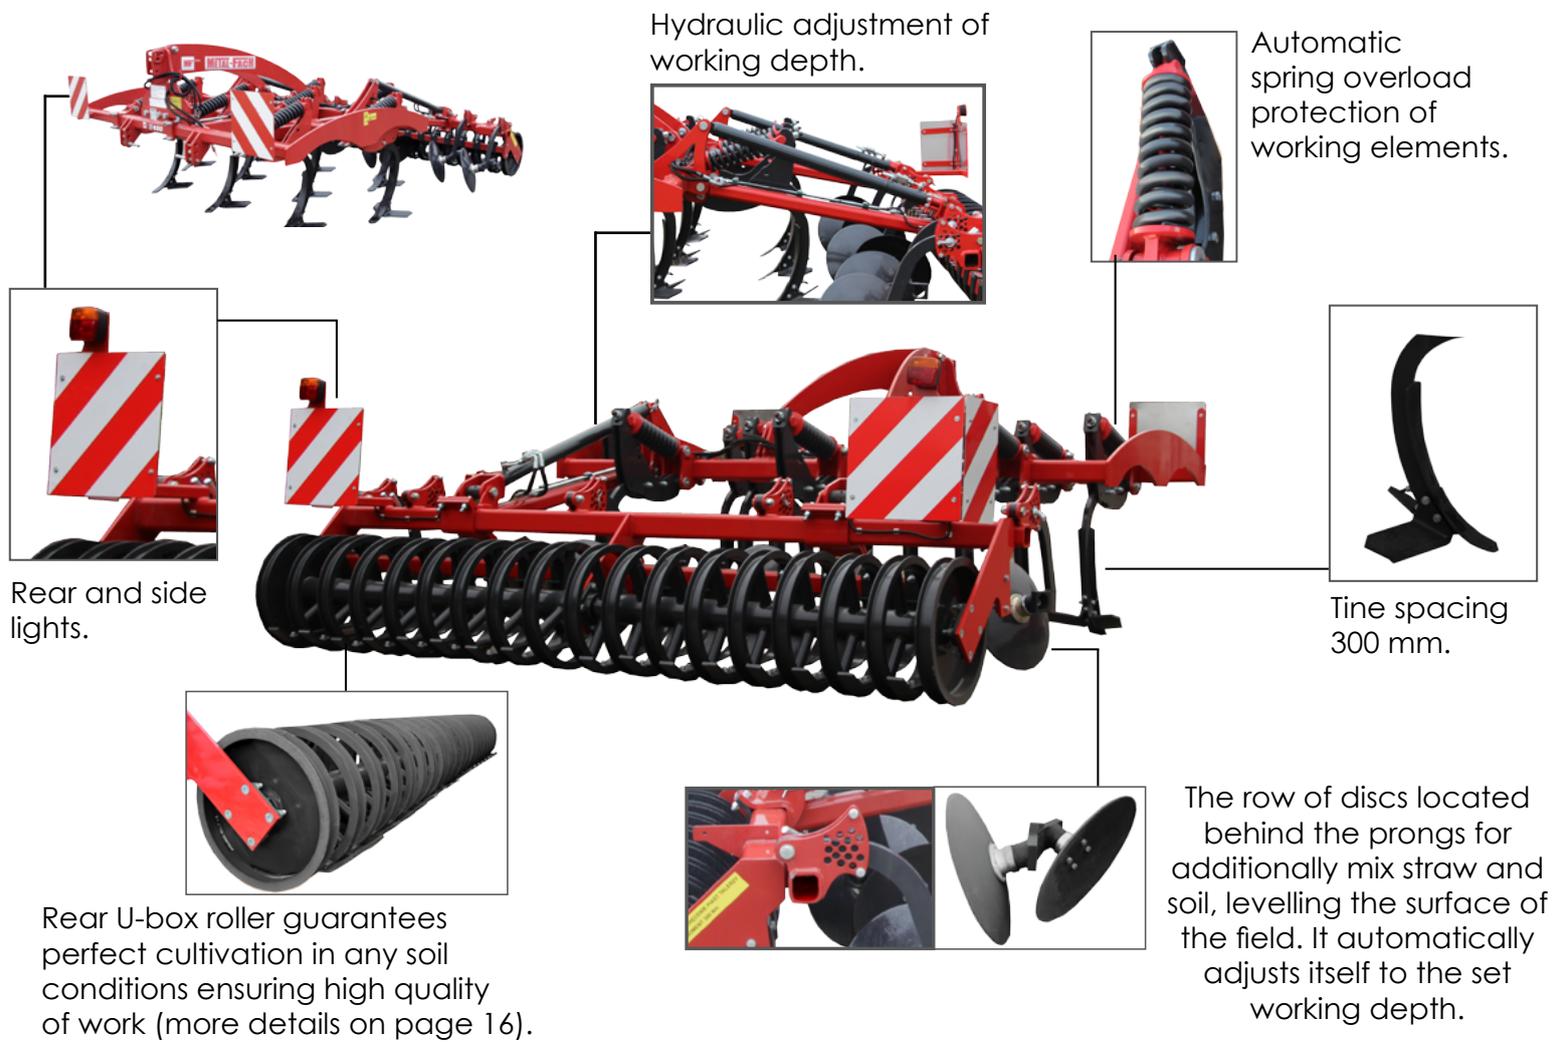

Hydraulic adjustment of working depth.

Automatic spring overload protection of working elements.

Rear and side lights.

Tine spacing 300 mm.

Rear U-box roller guarantees perfect cultivation in any soil conditions ensuring high quality of work (more details on page 16).

The row of discs located behind the prongs for additionally mix straw and soil, levelling the surface of the field. It automatically adjusts itself to the set working depth.



Item	Technical data:	U490	U490/1	U487
1	Working width/ height/ lenght [mm]	3000/1510/3880	3500/1510/3880	4200/1510/4060
2	Transport width/ height/ lenght [mm]	3000/1510/3880	3500/1510/3280	3000/2550/2940
3	Working depth	5-30 cm		
4	No. of prongs	10 pcs	12 pcs	14 pcs
5	Prongs spacing	300 mm		
6	Distance between rows	750 mm		
7	Frame section	100x100 mm		
8	Height from frame to ground [mm]	750		
9	No. of discs	7 pcs	8 pcs	10 pcs
10	Disc size	460x4 mm	460x4 mm	460x4 mm
11	Hitch	cat. 2, cat. 3		
12	Frame type	mounted, rigid	mounted, rigid	mounted, hydraulically-folded
13	Adjustment of working depth	hydraulic	hydraulic	hydraulic
14	Power demand:	120-190 HP	130-210 HP	150-240 HP
15	Weight with U-box roller	2120 kg	2340 kg	3400 kg
Optional equipment				
16	Hydraulic adjustment of working depth	V	V	V
17	Automatic spring overload protection of working elements	V	V	V
18	Lights and warning signs	V	V	V

Key:
V standard
• optional